



the LED lighting source™

COMMERCIAL • LANDSCAPE • ARCHITECTURAL • RESIDENTIAL

15 Brownridge Rd. Unit 6, Halton Hills, ON L7G 0C6 • 905-487-8192 • 1-877-LED-2DAY • SGIlighting.com

Project: _____


Client: _____

Part #: UND-P-4W-BEL-12VAC-BRS - 45 - lc

Date: / / Qty: _____

SPECIFICATION

LED Underwater Light • 4 Watt Bell

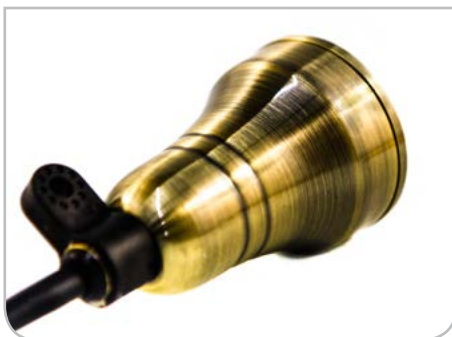

Operating Voltage (ov)	12V AC		
Finish (fin)	BRS	Brass	
Beam Angle (ba) Degrees	45°		
Light Colour (lc) Correlated Colour Temperature (CCT)	2700K	Incandescent White	
	3000K	Warm White	
	4000K	Neutral White	
	5000K	Cool White	
	Specify Kelvin (K) for other CCTs*		
	R Red*	G Green*	B Blue* A Amber*
Light Output Lumens	3000K	396	
	4000K	432	
	5000K	476	
IP Rating	IP68		
Dimension Diameter, Height	D	2"	50 mm
	H	3.15"	80 mm
Housing	Brass		
Watts	4W		
Light Source	4 x 1W LED		
Input Voltage	AC 100V – 240V, 277V external transformer		
Dimmable	Yes – with dimmable transformer		
Operating Temperature	-25°C to +50°C -13°F to 122°F		
Life Lumen Maintenance	50,000 hours		

Part Number Configuration – UND-P-4W-BEL-ov-fin-ba-lc

Category	Grade	Family	Operating Voltage (ov)	Finish (fin)	Beam Angle (ba)	Light Colour (lc)
UND	P-Professional	4W BEL	12VAC	BRS Brass	45°	2700K IW 3000K WW 4000K NW 5000K CW R* G* B* A*

* Available on special order