



the LED lighting source™

COMMERCIAL • LANDSCAPE • ARCHITECTURAL • RESIDENTIAL

15 Brownridge Rd. Unit 6, Halton Hills, ON L7G 0C6 • 905-487-8192 • 1-877-LED-2DAY • SGiLighting.com

Project: \_\_\_\_\_




Client: \_\_\_\_\_

Part #: BUL - P - 1W - MINI - 350MA - SIL - ba - lc

Date:      /      /      Qty: \_\_\_\_\_

SPECIFICATION

## LED Bullet Light • 1 Watt Mini

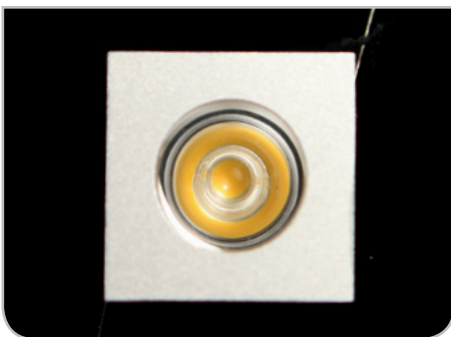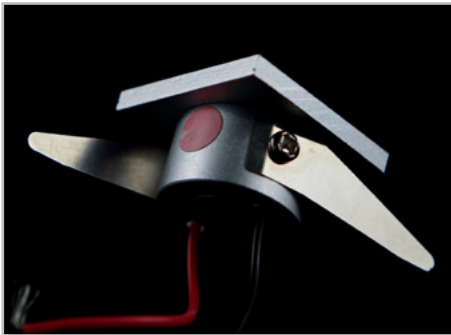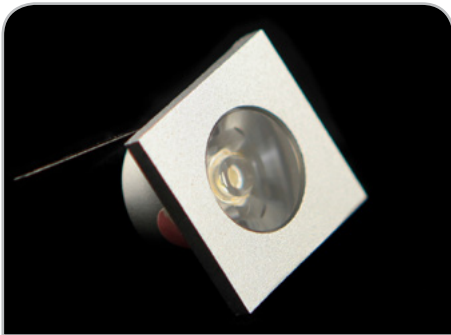

<b>Operating Voltage (ov)</b>	350 mA	Constant Current	
<b>Finish (fin)</b>	SIL	Silver	
<b>Beam Angle (ba)</b> Degrees	60°	15°*	
<b>Light Colour (lc)</b> Correlated Colour Temperature (CCT)	2700K	Incandescent White	
	3000K	Warm White	
	4000K	Neutral White	
	5000K	Cool White	
	Specify Kelvin (K) for other CCTs*		
	R Red*	G Green*	B Blue* A Amber*
<b>Light Output</b> Lumens	3000K	55.2	
	4000K	70.1	
	5000K	85.1	
<b>IP Rating</b>	IP55	IP65*	
<b>Dimension</b> Width/Height, Fixture Height (full height), Trim Height, Hole Size	W/H	1.18"	30 mm
	FH	0.66"	17 mm
	TH	0.15"	4 mm
	HS	0.86"	22 mm
<b>Housing</b>	Aluminum Finish		
<b>Watts</b>	1W		
<b>Light Source</b>	1 x 1W LED		
<b>Input Voltage</b>	AC 100V – 240V, 277V external driver		
<b>Dimmable</b>	Yes	With dimmable driver	
<b>Operating Temperature</b>	-25°C to +50°C		-13°F to 122°F
<b>Life</b> Lumen Maintenance	50,000 hours		

### Part Number Configuration – BUL-P-1W-MINI-ov-fin-ba-lc

Category	Grade	Family	Operating Voltage (ov)	Finish (fin)	Beam Angle (ba)	Light Colour (lc)
BUL	P-Professional	1W MINI	350MA	SIL Silver	15°* 60°	<b>2700K</b> IW <b>3000K</b> WW <b>4000K</b> NW <b>5000K</b> CW <b>R*</b> G* <b>B*</b> A*

\* Available on special order