



the LED lighting source™

COMMERCIAL • LANDSCAPE • ARCHITECTURAL • RESIDENTIAL

15 Brownridge Rd. Unit 6, Halton Hills, ON L7G 0C6 • 905-487-8192 • 1-877-LED-2DAY • SGIlighting.com

Project: _____


Client: _____

Part #: DECK – P – 1W – RND – 12VDC – SST – 120 – lc

Date: / / Qty: _____

SPECIFICATION

LED Deck Light • 0.5 Watt Round

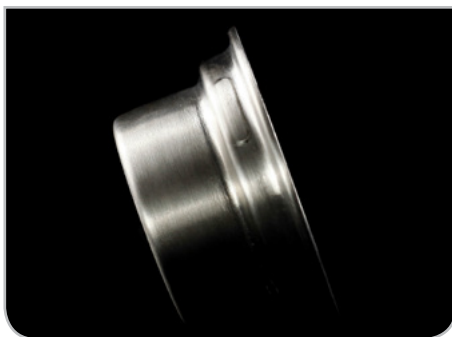

Operating Voltage (ov)	12V DC	Constant Voltage
Finish (fin)	SST	Stainless Steel
Beam Angle (ba) Degrees	120°	
Light Colour (lc) Correlated Colour Temperature (CCT)	2700K Incandescent White 3000K Warm White 4000K Neutral White 5000K Cool White RGB Colour Changing Specify Kelvin (K) for other CCTs* R Red* G Green* B Blue* A Amber*	
Light Output Lumens	3000K	34
	4000K	36.5
	5000K	39
IP Rating	IP65	
Dimension Diameter, Height, Hole Size	D	2.2" 57 mm
	H	1.2" 30 mm
	HS	2" 50 mm
Housing	Stainless Steel & Tempered Glass	
Watts	0.5W	
Light Source	1 x 0.5W LED	
Input Voltage	AC 100V – 240V, 277V	external transformer
Dimmable	Yes	With dimmable transformer
Operating Temperature	-25°C to +50°C	-13°F to 122°F
Life Lumen Maintenance	50,000 hours	

Part Number Configuration – DECK-P-1W-RND-ov-fin-ba-lc

Category	Grade	Family	Operating Voltage (ov)	Finish (fin)	Beam Angle (ba)	Light Colour (lc)
DECK	P-Professional	1W RND	12VDC	SST Stainless Steel	120°	2700K IW 3000K WW 4000K NW 5000K CW RGB R* G* B* A*

* Available on special order