



the LED lighting source™
 COMMERCIAL • LANDSCAPE • ARCHITECTURAL • RESIDENTIAL

15 Brownridge Rd. Unit 6, Halton Hills, ON L7G 0C6 • 905-487-8192 • 1-877-LED-2DAY • SGIlighting.com

Project: _____




Client: _____

Part #: ING - P - 3W - SQR - 12VDC - SST - 45 - RGB

Date: / / Qty: _____

SPECIFICATION

LED Inground Light • 3 Watt Square RGB

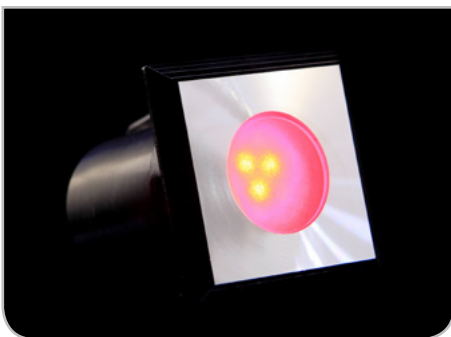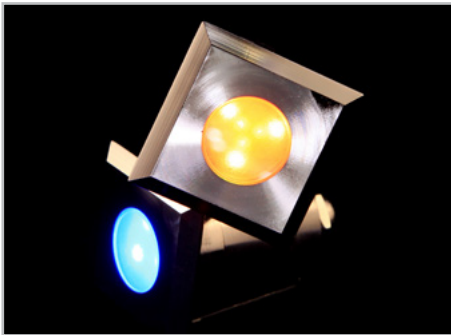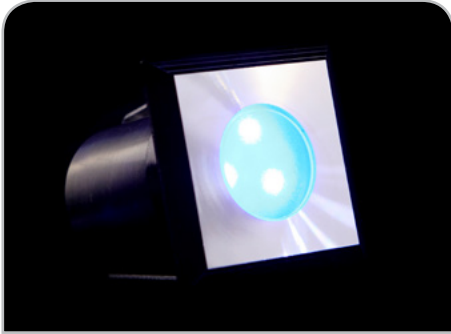

Operating Voltage (ov)	12V DC	Constant Voltage
Finish (fin)	SST	Stainless Steel
Beam Angle (ba) Degrees	45°	
Light Colour (lc) Correlated Colour Temperature (CCT)	RGB	Colour Changing
	Also available in Whites and Single Colours Please see individual product spec sheets	
Light Output Lumens	RGB White	268
IP Rating	IP67	
Dimension Width/Length, Fixture Height, Height with housing Trim Height Hole Size, Hole Size with housing	W/L FH HH TH HS HSH	1.65" 42 mm 2.32" 59 mm 3" 78 mm (with housing) 0.19" 5 mm 1.41" 36 mm 1.65" 42mm (with housing)
Housing	Stainless Steel	
Watts	3W	
Light Source	9 x 0.33W RGB LED	
Input Voltage	AC 100V – 240V, 277V	external driver
Dimmable	Yes	With dimmable transformer
Operating Temperature	-25°C to +50°C	-13°F to 122°F
Life Lumen Maintenance	50,000 hours	

Part Number Configuration – ING-P-3W-SQR-ov-fin-ba-lc

Category	Grade	Family	Operating Voltage (ov)	Finish (fin)	Beam Angle (ba)	Light Colour (lc)
ING	P-Professional	3W SQR	12VDC	SST Stainless Steel	45°	RGB