



the LED lighting source™

COMMERCIAL • LANDSCAPE • ARCHITECTURAL • RESIDENTIAL

15 Brownridge Rd. Unit 6, Halton Hills, ON L7G 0C6 • 905-487-8192 • 1-877-LED-2DAY • SGIlighting.com

Project: _____



Client: _____

Part #: POST – P – 1W – MINI – 12VDC – SIL – 120 – lc

Date: / / Qty: _____

SPECIFICATION

LED Post Light • 0.3 Watt Mini

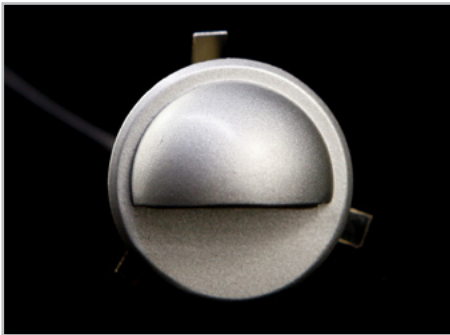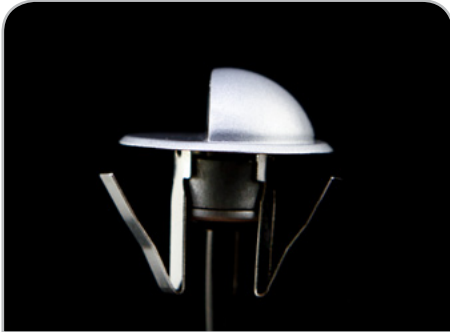

Operating Voltage (ov)	12V DC	Constant Voltage
Finish (fin)	SIL	Silver
Beam Angle (ba) Degrees	120°	
Light Colour (lc) Correlated Colour Temperature (CCT)	2700K Incandescent White 3000K Warm White 4000K Neutral White 5000K Cool White Specify Kelvin (K) for other CCTs* R Red* G Green* B Blue* A Amber*	
Light Output Lumens	3000K	21
	4000K	22.5
	5000K	24
IP Rating	IP65	
Dimension	D	1.37" 35 mm
Diameter,	FH	1.45" 37 mm
Fixture Height (full height),	TH	0.55" 14 mm
Trim Height, Hole Size	HS	0.75" 19 mm
Housing	Aluminum Finish	
Watts	0.3W	
Light Source	1 x 0.3W LED	
Input Voltage	AC 100V – 240V, 277V	external transformer
Dimmable	Yes	With dimmable transformer
Operating Temperature	-25°C to +50°C	-13°F to 122°F
Life Lumen Maintenance	50,000 hours	

Part Number Configuration – POST-P-1W-MINI-ov-fin-ba-lc

Category	Grade	Family	Operating Voltage (ov)	Finish (fin)	Beam Angle (ba)	Light Colour (lc)
POST	P-Professional	1W MINI	12VDC	SIL Silver	120°	2700K IW 3000K WW 4000K NW 5000K CW R* G* B* A*

* Available on special order