



the LED lighting source™
 COMMERCIAL • LANDSCAPE • ARCHITECTURAL • RESIDENTIAL

15 Brownridge Rd. Unit 6, Halton Hills, ON L7G 0C6 • 905-487-8192 • 1-877-LED-2DAY • SGiLighting.com

Project: _____


Client: _____

Part #: DOWN-10W-350MA- SIL - 60 - lc

Date: / / Qty: _____

SPECIFICATION

LED Downlight • 10 Watt

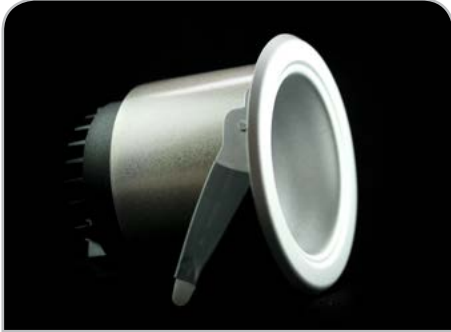

Operating Voltage (ov)	350 mA 16.5 V DC 19.5 V DC	Constant Current Typical Maximum
Finish (fin)	SIL	Silver
Beam Angle (ba) Degrees	60°	
Light Colour (lc) Correlated Colour Temperature (CCT)	3000K 5000K	Warm White Cool White
Light Output Lumens	3000K 5000K	680 761
IP Rating	IP55	
Dimension Diameter, Height, Hole Size	D H HS	4.37" 4.13" 3.81" 111 mm 105 mm 97 mm
Housing	Aluminum Alloy	
Watts	10W	
Light Source	1 x 10W LED COB Chip on Board	
Input Voltage	AC 100V – 240V, 277V external driver	
Dimmable	No	
Operating Temperature	-25°C to +50°C -13°F to 122°F	
Life Lumen Maintenance	50,000 hours	

Part Number Configuration – DOWN-10W-ov-fin-ba-lc

Category	Family	Operating Voltage (ov)	Finish (fin)	Beam Angle (ba)	Light Colour (lc)
DOWN	10W	350MA	SIL Silver	60°	3000K WW 5000K CW