



the LED lighting source™

COMMERCIAL • LANDSCAPE • ARCHITECTURAL • RESIDENTIAL

15 Brownridge Rd. Unit 6, Halton Hills, ON L7G 0C6 • 905-487-8192 • 1-877-LED-2DAY • SGiLighting.com

Project: _____


Client: _____

Part #: DOWN-7WS-350MA- fin - ba - lc

Date: / / Qty: _____

SPECIFICATION

LED Downlight • 7 Watt Swivel

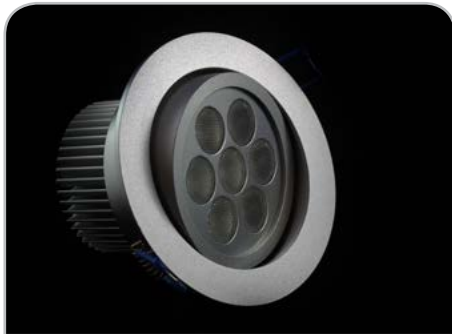

Operating Voltage (ov)	350 mA 23.1 V DC 27.3 V DC	Constant Current Typical Maximum
Finish (fin)	WHT SIL	White Silver
Beam Angle (ba) Degrees	60°	15°* 38°*
Light Colour (lc) Correlated Colour Temperature (CCT)	2700K 3000K 3500K 4000K 5000K	Incandescent White Warm White Sand White Neutral White Cool White Specify Kelvin (K) for other CCTs* R Red* G Green* B Blue* A Amber*
Light Output Lumens	3000K 3500K 4000K 5000K	470 515 560 650
IP Rating	IP55	IP65*
Dimension Diameter, Height, Hole Size	D H HS	4.25" 108 mm 2.44" 62 mm 3.75" 95 mm
Housing	Aluminum Alloy	
Watts	7W	
Light Source	7 x 1W LED MLT	Multiple LED Source
Input Voltage	AC 100V – 240V, 277V	external driver
Dimmable	Yes – with dimmable driver	
Operating Temperature	-25°C to +50°C	-13°F to 122°F
Life Lumen Maintenance	50,000 hours	

Part Number Configuration – DOWN-7WS-ov-fin-ba-lc

Category	Family	Operating Voltage (ov)	Finish (fin)	Beam Angle (ba)	Light Colour (lc)
DOWN	7WS	350MA	WHT White SIL Silver	15°* 38°* 60°	2700K IW 3000K WW 3500K SW 4000K NW 5000K CW R* G* B* A*

* Available on special order