



the LED lighting source™

COMMERCIAL • LANDSCAPE • ARCHITECTURAL • RESIDENTIAL

15 Brownridge Rd. Unit 6, Halton Hills, ON L7G 0C6 • 905-487-8192 • 1-877-LED-2DAY • SGiLighting.com

Project: _____


Client: _____

Part #: DOWN-05-P-9WS-350MA-fin-ba-lc

Date: dd / mm / yyyy Qty: _____

SPECIFICATION

LED Downlight • 9 Watt Swivel

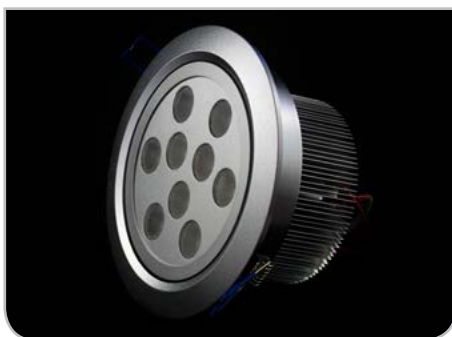

Operating Voltage (ov)	350 mA 29.7 V DC 35.1 V DC	Constant Current Typical Maximum
Finish (fin)	WHT SIL	White Silver
Beam Angle (ba) Degrees	60°	15°* 38°*
Light Colour (lc) Correlated Colour Temperature (CCT)	IW WW NW CW	Incandescent White 2700K* Warm White 3000K Neutral White 4000K* Cool White 5500K Specify Kelvin (K) for other CCTs* R Red* G Green* B Blue* A Amber*
Light Output Lumens	WW NW CW	605 725 845
IP Rating	IP55	IP65*
Dimension Diameter, Height, Hole Size	D H HS	5.39" 137 mm 2.67" 68 mm 4.75" 120 mm
Housing	Aluminum Alloy	
Watts	9W	
Light Source	9 x 1W LED MLT	Multiple LED Source
Input Voltage	AC 100V – 240V, 277V	external driver
Dimmable	Yes – with dimmable driver	
Operating Temperature	-25°C to +50°C	-13°F to 122°F
Life Lumen Maintenance	50,000 hours	

Professional Grade

Part Number Configuration – DOWN-05-P-9WS-ov-fin-ba-lc

Category	Grade	Family	Operating Voltage (ov)	Finish (fin)	Beam Angle (ba)	Light Colour (lc)
DOWN-05	P Professional	9WS	350MA	WHT White SIL Silver	15°* 38°* 60°	IW 2700K* WW 3000K NW 4000K* CW 5500K R* G* B* A*

* Available on special order