



the LED lighting source™  
COMMERCIAL • LANDSCAPE • ARCHITECTURAL • RESIDENTIAL

15 Brownridge Rd. Unit 6, Halton Hills, ON L7G 0C6 • 905-487-8192 • 1-877-LED-2DAY • SGIlighting.com

Project: \_\_\_\_\_



Client: \_\_\_\_\_

Part #: DOWNC-P-20W-6IN- fin - 40 - lc

Date:    /    /    Qty: \_\_\_\_\_

SPECIFICATION

## LED Downlight Commercial • 20 Watt 6 Inch

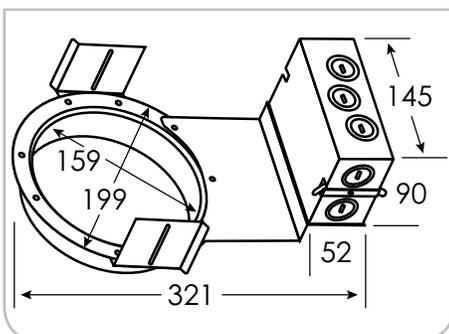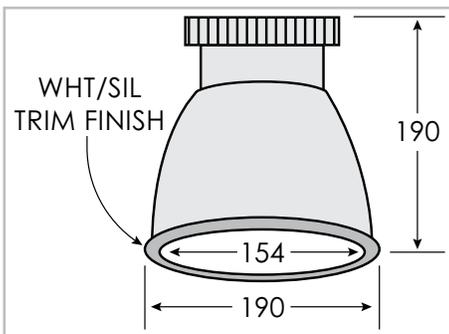

Dimensions in millimeters

**Part Number Configuration** – DOWNC-P-20W-6IN-fin-ba-lc

<b>Operating Voltage (ov)</b>	480 mA 35 V DC 38 V DC	Constant Current Typical Maximum
<b>Finish (fin)</b>	SIL      Silver	WHT      White
<b>Beam Angle (ba)</b> Degrees	40°	
<b>Light Colour (lc)</b> Correlated Colour Temperature (CCT)	2700K 3000K 4000K 5000K	Incandescent White Warm White Neutral White Cool White
<b>Light Output</b> Lumens	2700K    1400 3000K    1440 4000K    1580 5000K    1600	
<b>IP Rating</b>	IP20	
<b>Dimension</b> Inner Diameter, Trim Diameter, Height	ID      6.1"      154 mm TD      7.5"      190 mm H       7.5"      190 mm	
<b>Housing</b>	Aluminum Alloy	
<b>Watts</b>	20W	
<b>Light Source</b>	1 x 20W LED COB    Chip on Board	
<b>Input Voltage</b>	AC 100V – 277V	
<b>Dimmable</b>	Yes (0-10V)	
<b>Operating Temperature</b>	-25°C to +50°C    -13°F to 122°F	
<b>Life</b> Lumen Maintenance	50,000 hours	

Category	Grade	Family	Finish (fin)	Beam Angle (ba)	Light Colour (lc)
DOWNC	P- Professional	20W 6IN	SIL    Silver WHT    White	40°	2700K    IW 3000K    WW 4000K    NW 5000K    CW