


LED Flex Light • ExtremeBright 11.2 Watt

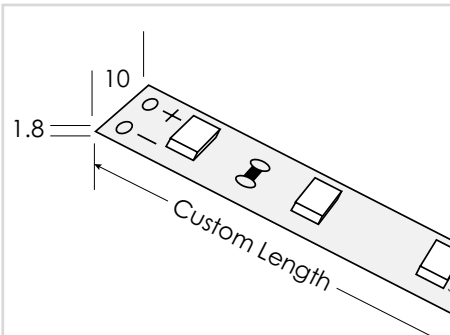

Dimensions in millimeters

Length	Custom Length ² cuttable every 2.0"(50.8 mm)		
Operating Voltage	24V DC		
Finish (fin)	Bare board (no covering), available in: WHT White PCB BLK Black PCB ¹		
Light Colour (lc) Correlated Colour Temperature (CCT)	2700K	Incandescent White	
	3000K	Warm White	
	3500K	Sand White	
	4000K	Neutral White	
	5000K	Cool White	
	CST	R Red, G Green, B Blue, A Amber ³	
Beam Angle (ba) Degrees	120°		
Light Output Lumens (at 90 CRI)	2700K	1045.5	per foot
	3000K	1100.5	per foot
	3500K	1158.5	per foot
	4000K	1216.4	per foot
	5000K	1277.2	per foot
CRI (cri) Colour Rendering Index	90		
IP Rating	IP33		
Dimension Width, Height, Length	W	0.393"	10 mm
	H	0.05"	1.4 mm
	L	Specify maximum length in inches	
Watts	11.2 Watts per foot		
Input Voltage	AC 100V – 240V, 277V external transformer		
Dimmable	Yes With dimmable transformer MLV, ELV, Phase or 0-10V. Please specify at time of order. Sold separately.		
Operating Temperature	-25°C to +50°C		-13°F to 122°F
Life Lumen Maintenance	50,000 hours		
Warranty	5 Years		

Recommended Tracks

REC2428

UCH2428

See track page for more compatible tracks. See individual track cutsheets for more details.

Part Number Configuration

FLEX	EXTREME_11.2W	24VDC		90
-------------	----------------------	--------------	--	-----------

Category	Family (fam)	Operating Voltage	Finish (fin)	Light Colour (lc)	CRI (cri)
FLEX	EXTREME_11.2W	24VDC	WHT White BLK Black ¹	2700K 3000K 3500K 4000K 5000K CST ³	90



¹ SPECIAL ORDER. Please confirm availability. Allow for 4 – 6 weeks lead time. ² See Connections page(s) for more details.

³ SPECIAL ORDER: Available in single colour R Red, G Green, B Blue, A Amber.