


LED Flex Light • RegularBright 2.2 Watt

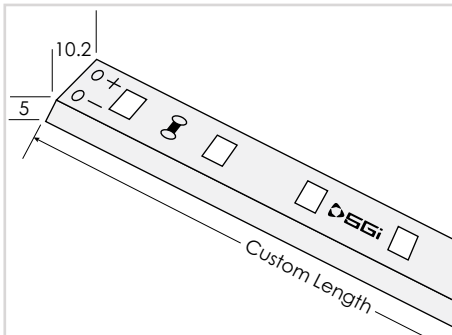

Dimensions in millimeters

Length	Custom Length ² cuttable every 6.5"(165.1 mm)		
Operating Voltage	24V DC		
Finish (fin)	Rugged – silicone injected, available in: WHT White PCB BLK Black PCB ¹		
Light Colour (lc) Correlated Colour Temperature (CCT)	2700K	Incandescent White	
	3000K	Warm White	
	3500K	Sand White	
	4000K	Neutral White	
	5000K	Cool White	
	CST	R Red, G Green, B Blue, A Amber ³	
Beam Angle (ba) Degrees	120°		
Light Output Lumens (at 90 CRI)	2700K	139.8	per foot
	3000K	145.4	per foot
	3500K	151.1	per foot
	4000K	163.4	per foot
	5000K	173.7	per foot
CRI (cri) Colour Rendering Index	90		
IP Rating	IP67		
Dimension Width, Height, Length	W	0.394"	10 mm
	H	0.157"	4 mm
	L	Specify maximum length in inches	
Watts	2.2 Watts per foot		
Input Voltage	AC 100V – 240V, 277V external transformer		
Dimmable	Yes With dimmable transformer MLV, ELV, Phase or 0-10V. Please specify at time of order. Sold separately.		
Operating Temperature	-25°C to +50°C		-13°F to 122°F
Life Lumen Maintenance	50,000 hours		
Warranty	5 Years		

Recommended Tracks

LP1813

REC1707

UCH1715

GENIE_PROFILE-DOME

See track page for more compatible tracks. See individual track cutsheets for more details.

Part Number Configuration

FLEX

REG_2.2W

24VDC

90

Category

Family (fam)

Operating Voltage

Finish (fin)

Light Colour (lc)

CRI (cri)

FLEX

REG_2.2W

24VDC

WHT White
BLK Black¹2700K
3000K
3500K
4000K
5000K
CST³

90

¹ SPECIAL ORDER. Please confirm availability. Allow for 4 – 6 weeks lead time. ² See Connections page(s) for more details.³ SPECIAL ORDER: Available in single colour R Red, G Green, B Blue, A Amber.