
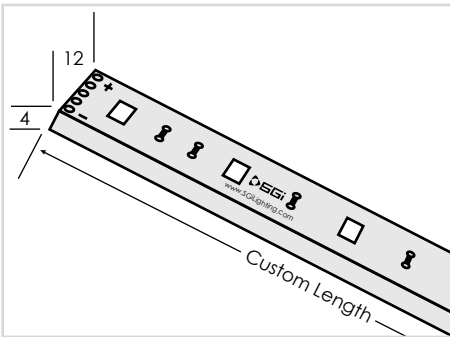


# LED Flex Light • RegularBright 3 Watt RGBW

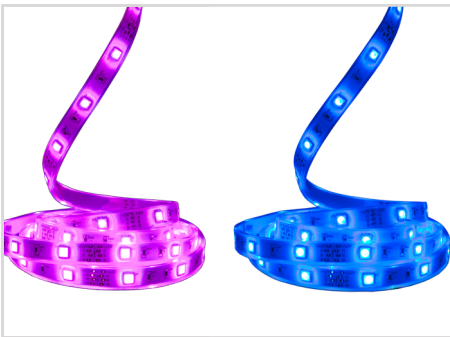

Dimensions in millimeters

<b>Length</b>	Custom Length <sup>2</sup> cuttable every 4.0"(101.6 mm)		
<b>Operating Voltage</b>	24V DC		
<b>Finish (fin)</b>	Rugged – silicone injected, available in: WHT White PCB BLK Black PCB <sup>1</sup>		
<b>Light Colour (lc)</b> Correlated Colour Temperature (CCT)	RGBW2700K Colour Changing with 2700K RGBW3000K Colour Changing with 3000K RGBW4000K Colour Changing with 4000K RGBW5000K Colour Changing with 5000K  Also available in Whites and Single Colours Please see individual product spec sheets		
<b>Beam Angle (ba)</b> Degrees	120°		
<b>Light Output</b> Lumens	RGBW3000K	145.4	per foot
	RGBW4000K	163.4	per foot
	RGBW5000K	173.7	per foot
<b>CRI (cri)</b> Colour Rendering Index	90 for single colour white components only		
<b>IP Rating</b>	IP67		
<b>Dimension</b> Width, Height, Length	W	0.472" 12 mm	
	H	0.157" 4 mm	
	L	Specify maximum length in inches	
<b>Watts</b>	3 Watts per foot		
<b>Input Voltage</b>	AC 100V – 240V, 277V external transformer		
<b>Dimmable</b>	Yes With dimmable transformer MLV, ELV, Phase or 0-10V. Please specify at time of order. Sold separately.		
<b>Operating Temperature</b>	-25°C to +50°C		-13°F to 122°F
<b>Life</b> Lumen Maintenance	50,000 hours		
<b>Warranty</b>	5 Years		

## Recommended Tracks

LP1813

GENIE\_PROFILE-DOME

See track page for more compatible tracks. See individual track cutsheets for more details.

## Part Number Configuration

<b>FLEX</b>	<b>REG_3W</b>	<b>24VDC</b>		<b>90</b>
-------------	---------------	--------------	--	-----------

Category	Family (fam)	Operating Voltage	Finish (fin)	Light Colour (lc)	CRI (cri)
FLEX	REG_3W	24VDC	WHT White BLK Black <sup>1</sup>	RGBW2700K RGBW3000K RGBW4000K RGBW5000K	90



<sup>1</sup> SPECIAL ORDER. Please confirm availability. Allow for 4 – 6 weeks lead time. <sup>2</sup> See Connections page(s) for more details.