
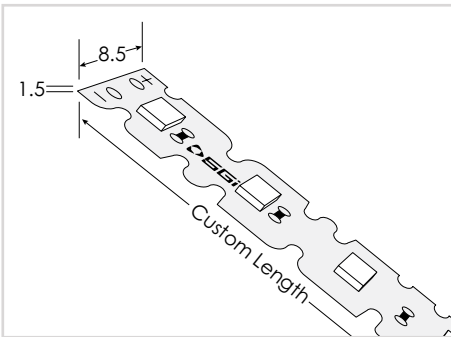


LED Flex Light • UltraBright 4.4 Watt Bendable

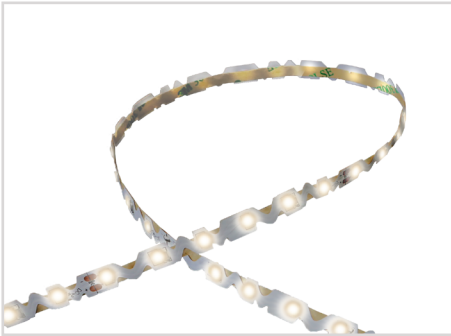

Dimensions in millimeters.

Length	Custom Length cuttable every 3.95" (100.3 mm)		
Operating Voltage	24V DC		
Finish (fin)	Bare board (no covering), available in: WHT White PCB		
Light Colour (lc) Correlated Colour Temperature (CCT)	2700K 3000K 3500K 4000K 5000K CST	Incandescent White Warm White Sand White Neutral White Cool White R Red, G Green, B Blue, A Amber ²	
Beam Angle (ba) Degrees	120°		
Light Output Lumens (at 90 CRI)	2700K 3000K 3500K 4000K 5000K	275 289 296 304 320	per foot per foot per foot per foot per foot
CRI (cri) Colour Rendering Index	90		
IP Rating	IP20		
Dimension Width, Height, Length	W H L	0.315" 0.083" Specify maximum length in inches	8 mm 2.1 mm
Watts	4.4 Watts per foot		
Input Voltage	AC 100V – 240V, 277V external transformer		
Dimmable	Yes With dimmable transformer MLV, ELV, Phase or 0-10V. Please specify at time of order. Sold separately.		
Operating Temperature	-25°C to +50°C		-13°F to 122°F
Life Lumen Maintenance	50,000 hours		
Warranty	5 Years		

Part Number Configuration

FLEX	ULTRABEND_4.4W	24VDC	WHT	90
-------------	-----------------------	--------------	------------	-----------

Category	Family	Operating Voltage	Finish (fin)	Light Colour (lc)	CRI (cri)
FLEX	ULTRABEND_4.4W	24VDC	WHT White	2700K 3000K 3500K 4000K 5000K CST ³	90



¹ SPECIAL ORDER. Please confirm availability. Allow for 4 – 6 weeks lead time.

² SPECIAL ORDER: Available in single colour R Red, G Green, B Blue, A Amber.