


LED Flex Light • UltraBright 4.4 Watt Slim

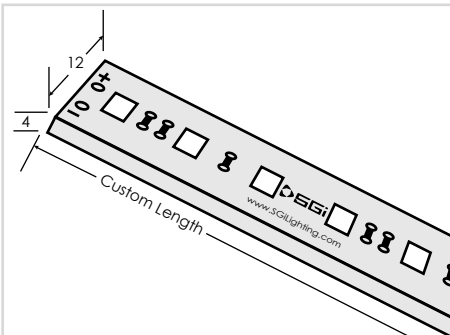

Dimensions in millimeters

Length	Custom Length ² cuttable every 4.0" (101.6 mm)		
Operating Voltage	24V DC		
Finish (fin)	Rugged – silicone injected, available in: WHT White PCB BLK Black PCB ¹		
Light Colour (lc) Correlated Colour Temperature (CCT)	2700K 3000K 3500K 4000K 5000K CST	Incandescent White Warm White Sand White Neutral White Cool White R Red, G Green, B Blue, A Amber ³	
Beam Angle (ba) Degrees	120°		
Light Output Lumens (at 90 CRI)	2700K 3000K 3500K 4000K 5000K	310.6 338.2 365.8 393.2 420.7	per foot per foot per foot per foot per foot
CRI (cri) Colour Rendering Index	90		
IP Rating	IP67		
Dimension Width, Height, Length	W H L	0.472" 12 mm 0.157" 4 mm Specify maximum length in inches	
Watts	4.4 Watts per foot		
Input Voltage	AC 100V – 240V, 277V external transformer		
Dimmable	Yes With dimmable transformer MLV, ELV, Phase or 0-10V. Please specify at time of order. Sold separately.		
Operating Temperature	-25°C to +50°C		-13°F to 122°F
Life Lumen Maintenance	50,000 hours		
Warranty	5 Years		

Recommended Tracks

LP1813

UCH2428

See track page for more compatible tracks. See individual track cutsheets for more details.

Part Number Configuration

FLEX	ULTRASL_4.4W	24VDC		90
-------------	---------------------	--------------	--	-----------

Category	Family (fam)	Operating Voltage	Finish (fin)	Light Colour (lc)	CRI (cri)
FLEX	ULTRASL_4.4W	24VDC	WHT White BLK Black ¹	2700K 3000K 3500K 4000K 5000K CST ³	90



¹ SPECIAL ORDER. Please confirm availability. Allow for 4 – 6 weeks lead time. ² See Connections page(s) for more details.

³ SPECIAL ORDER: Available in single colour R Red, G Green, B Blue, A Amber.