


LED Flex Light • UltraBright 4.4 Watt RGB

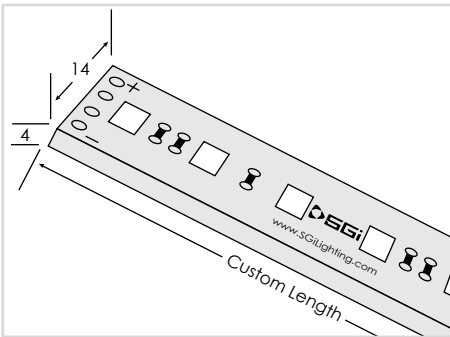

Dimensions in millimeters

Length	Custom Length ² cuttable every 4.0"(101.6 mm)
Operating Voltage	24V DC
Finish (fin)	Rugged – silicone injected, available in: WHT White PCB BLK Black PCB ¹
Light Colour (lc) Correlated Colour Temperature (CCT)	RGB Colour Changing Also available in Whites and Single Colours Please see individual product spec sheets
Beam Angle (ba) Degrees	120°
Light Output Lumens	RGB White 336.6 per foot
IP Rating	IP67
Dimension Width, Height, Length	W 0.551" 14 mm H 0.157" 4 mm L Specify maximum length in inches
Watts	4.4 Watts per foot
Input Voltage	AC 100V – 240V, 277V external transformer
Dimmable	Yes With dimmable transformer MLV, ELV, Phase or 0-10V. Please specify at time of order. Sold separately.
Operating Temperature	-25°C to +50°C -13°F to 122°F
Life Lumen Maintenance	50,000 hours
Warranty	5 Years

Recommended Tracks

LP2410

REC2421

UCH2428

GENIE_PROFILE-DOME

See track page for more compatible tracks. See individual track cutsheets for more details.

Part Number Configuration

FLEX	ULTRA_4.4W	24VDC		RGB
Category	Family (fam)	Operating Voltage (ov)	Finish (fin)	Light Colour (lc)
FLEX	ULTRA_4.4W	24V DC	WHT White BLK Black ¹	RGB



¹ SPECIAL ORDER. Please confirm availability. Allow for 4 – 6 weeks lead time. ² See Connections page(s) for more details.