


# LED Flex Light • UltraBright 4.4 Watt RGBW

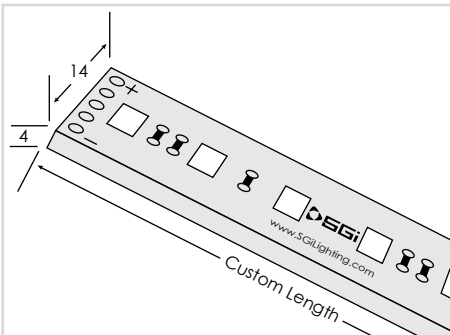

Dimensions in millimeters

<b>Length</b>	Custom Length cuttable every 4.0" (101.6 mm)		
<b>Operating Voltage</b>	24V DC		
<b>Finish (fin)</b>	Rugged – silicone injected, available in: WHT White PCB BLK Black PCB <sup>1</sup>		
<b>Light Colour (lc)</b> Correlated Colour Temperature (CCT)	RGBW3000K Colour Changing with 3000K RGBW4000K Colour Changing with 4000K RGBW5000K Colour Changing with 5000K  Also available in Whites and Single Colours Please see individual product spec sheets		
<b>Beam Angle (ba)</b> Degrees	120°		
<b>Light Output</b> Lumens (at 90 CRI)	RGBW3000K	338.2	per foot
	RGBW4000K	393.2	per foot
	RGBW5000K	420.7	per foot
<b>CRI (cri)</b> Colour Rendering Index	90+ for single colour white components only		
<b>IP Rating</b>	IP67		
<b>Dimension</b> Width, Height, Length	W	0.551"	14 mm
	H	0.157"	4 mm
	L	Specify maximum length in inches	
<b>Watts</b>	5.8 Watts per foot		
<b>Input Voltage</b>	AC 100V – 240V, 277V external transformer		
<b>Dimmable</b>	Yes With dimmable transformer MLV, ELV, Phase or 0-10V. Please specify at time of order. Sold separately.		
<b>Operating Temperature</b>	-25°C to +50°C		-13°F to 122°F
<b>Life</b> Lumen Maintenance	50,000 hours		
<b>Warranty</b>	5 Years		

## Recommended Tracks

LP2410

REC2421

UCH2428

GENIE\_PROFILE-DOME

See track page for more compatible tracks. See individual track cutsheets for more details.

## Part Number Configuration

FLEX

ULTRA\_4.4W

24VDC

90+

Category

Family (fam)

Operating Voltage

Finish (fin)

Light Colour (lc)

CRI (cri)

FLEX

ULTRA\_4.4W

24VDC

WHT White  
BLK Black<sup>1</sup>RGBW3000K  
RGBW4000K  
RGBW5000K

90+

<sup>1</sup> SPECIAL ORDER. Please confirm availability. Allow for 4 – 6 weeks lead time.