


LED Flex Light • UltraBright 4.4 Watt RGBW IP68

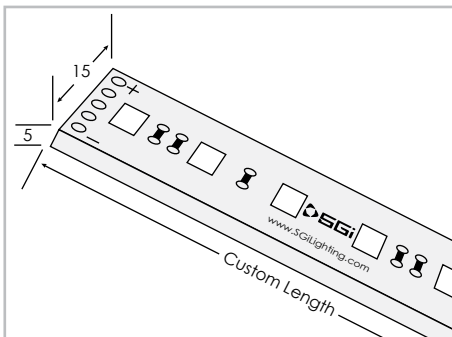

Dimensions in millimeters

Length	Custom Length cuttable every 4.0"(101.6 mm)		
Operating Voltage	24V DC		
Finish (fin)	Rugged – silicone injected, available in: WHTC White PCB Clear Housing WHTF White PCB Frosted Housing BLK Black PCB ¹ Clear Housing		
Light Colour (lc) Correlated Colour Temperature (CCT)	RGBW2700K Colour Changing with 2700K RGBW3000K Colour Changing with 3000K RGBW4000K Colour Changing with 4000K RGBW5000K Colour Changing with 5000K Also available in Whites and Single Colours Please see individual product spec sheets		
Beam Angle (ba) Degrees	120°		
Light Output Lumens	RGBW3000K	338.2	per foot
	RGBW4000K	393.2	per foot
	RGBW5000K	420.7	per foot
IP Rating	IP68 ¹		
Dimension Width, Height, Length	W	0.590"	15 mm
	H	0.197"	4 mm
	L	Specify maximum length in inches	
Watts	4.4Watts per foot		
Input Voltage	AC 100V – 240V, 277V external transformer		
Dimmable	Yes With dimmable transformer ELV, Phase or 0-10V. Please specify at time of order.		
Operating Temperature	-25°C to +50°C		-13°F to 122°F
Life Lumen Maintenance	50,000 hours		

Recommended Install

No track. Silicone mount LED Flex lights to dry surface. Let silicone cure for 24 hours before submersing the lights.

Part Number Configuration

FLEX	ULTRA_4.4W-IP68¹	24VDC		
Category	Family (fam)	Operating Voltage	Finish (fin)	Light Colour (lc)
FLEX	ULTRA_4.4W-IP68 ¹	24VDC	WHTC White Clear WHTF White Frosted BLKC Black Clear	RGBW2700K RGBW3000K RGBW4000K RGBW5000K



¹ SPECIAL ORDER. Please confirm availability. Allow for 4 – 6 weeks lead time.