


LED Flex Light • UltraBright 5.2 Watt

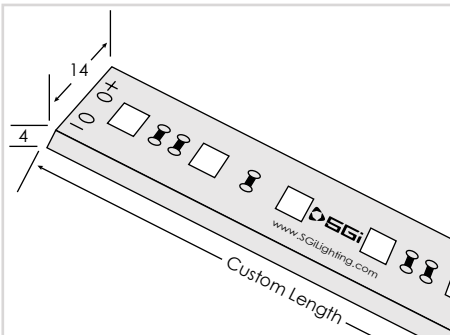

Dimensions in millimeters

Length	Custom Length ² cuttable every 3.2"(81.28 mm)		
Operating Voltage	24V DC		
Finish (fin)	Rugged – silicone injected, available in: WHT White PCB BLK Black PCB ¹		
Light Colour (lc) Correlated Colour Temperature (CCT)	2700K Incandescent White 3000K Warm White 3500K Sand White 4000K Neutral White 5000K Cool White CST R Red, G Green, B Blue, A Amber ³		
Beam Angle (ba) Degrees	120°		
Light Output Lumens (at 90 CRI)	2700K	520.1	per foot
	3000K	547.4	per foot
	3500K	576.2	per foot
	4000K	605.1	per foot
	5000K	635.3	per foot
CRI (cri) Colour Rendering Index	90		
IP Rating	IP67		
Dimension Width, Height, Length	W	0.551"	14 mm
	H	0.157"	4 mm
	L	Specify maximum length in inches	
Watts	5.2 Watts per foot		
Input Voltage	AC 100V – 240V, 277V external transformer		
Dimmable	Yes With dimmable transformer MLV, ELV, Phase or 0-10V. Please specify at time of order. Sold separately.		
Operating Temperature	-25°C to +50°C		-13°F to 122°F
Life Lumen Maintenance	50,000 hours		
Warranty	5 Years		

Recommended Tracks

LP2410

REC2421

UCH2428

GENIE_PROFILE-DOME

See track page for more compatible tracks. See individual track cutsheets for more details.

Part Number Configuration

FLEX

ULTRA_5.2W

24VDC

90

Category

Family (fam)

Operating Voltage

Finish (fin)

Light Colour (lc)

CRI (cri)

FLEX

ULTRA_5.2W

24VDC

WHT White
BLK Black¹2700K
3000K
3500K
4000K
5000K
CST³

90



¹ SPECIAL ORDER. Please confirm availability. Allow for 4 – 6 weeks lead time. ² See Connections page(s) for more details.

³ SPECIAL ORDER: Available in single colour R Red, G Green, B Blue, A Amber.