


LED Flex Light • UltraBright 5.2 Watt IP68

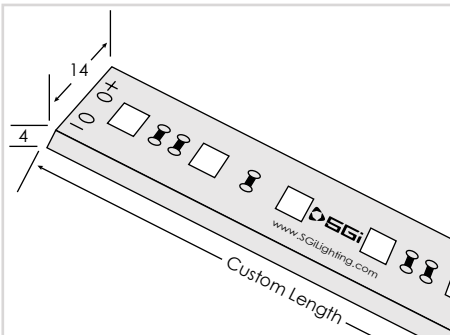

Dimensions in millimeters

Length	Custom Length ² cuttable every 3.2"(81.28 mm)		
Operating Voltage	24V DC		
Finish (fin)	WHTC	Clear White	
	WHTF	Frosted White ¹	
	BLKC	Clear Black ¹	
Light Colour (lc) Correlated Colour Temperature (CCT)	2700K	Incandescent White	
	3000K	Warm White	
	3500K	Sand White	
	4000K	Neutral White	
	5000K	Cool White	
	CST	R Red, G Green, B Blue, A Amber ³	
	See RGB spec sheets for Colour Changing options		
Beam Angle (ba) Degrees	120°		
Light Output Lumens (at 90 CRI)	2700K	520.1	per foot
	3000K	547.4	per foot
	3500K	576.2	per foot
	4000K	605.1	per foot
	5000K	635.3	per foot
CRI (cri) Colour Rendering Index	90		
IP Rating	IP68 ¹		
Dimension Width, Height, Length	W	0.551"	14 mm
	H	0.157"	4 mm
	L	Specify maximum length in inches	
Watts	5.2 Watts per foot		
Input Voltage	AC 100V – 240V, 277V external transformer		
Dimmable	Yes With dimmable transformer MLV, ELV, Phase or 0-10V. Please specify at time of order. Sold separately.		
Operating Temperature	-25°C to +50°C		-13°F to 122°F
Life Lumen Maintenance	50,000 hours		
Warranty	5 Years		

Recommended Tracks

LP2410

REC2421

UCH2428

GENIE_PROFILE-DOME

See track page for more compatible tracks. See individual track cutsheets for more details.

Part Number Configuration

FLEX	ULTRA_5.2W-IP68	24VDC		90
-------------	------------------------	--------------	--	-----------

Category	Family (fam)	Operating Voltage	Finish (fin)	Light Colour (lc)	CRI (cri)
FLEX	ULTRA_5.2W-IP68 ¹	24VDC	WHTC Clear White WHTF Frosted White ¹ BLKC Clear Black ¹	2700K 3000K 3500K 4000K 5000K CST³	90



¹ SPECIAL ORDER. Please confirm availability. Allow for 4 – 6 weeks lead time. ² See Connections page(s) for more details.

³ SPECIAL ORDER: Available in single colour R Red, G Green, B Blue, A Amber.