


LED Flex Light • UltraBright 5.2 Watt RGBW

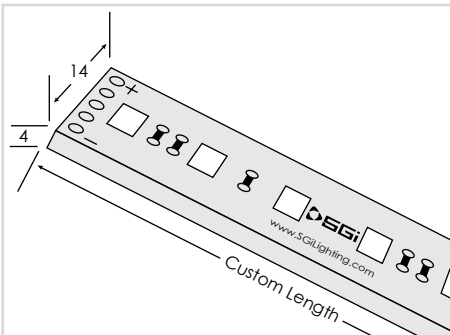

Dimensions in millimeters

Length	Custom Length ² cuttable every 4.0"(101.6 mm)		
Operating Voltage	24V DC		
Finish (fin)	Rugged – silicone injected, available in: WHT White PCB BLK Black PCB ¹		
Light Colour (lc) Correlated Colour Temperature (CCT)	RGBW2700K Colour Changing with 2700K RGBW3000K Colour Changing with 3000K RGBW4000K Colour Changing with 4000K RGBW5000K Colour Changing with 5000K Also available in Whites and Single Colours Please see individual product spec sheets		
Beam Angle (ba) Degrees	120°		
Light Output Lumens	RGBW3000K	547.4	per foot
	RGBW4000K	605.1	per foot
	RGBW5000K	635.3	per foot
IP Rating	IP67		
Dimension Width, Height, Length	W	0.551" 14 mm	
	H	0.157" 4 mm	
	L	Specify maximum length in inches	
Watts	5.2 Watts per foot		
Input Voltage	AC 100V – 240V, 277V external transformer		
Dimmable	Yes With dimmable transformer MLV, ELV, Phase or 0-10V. Please specify at time of order. Sold separately.		
Operating Temperature	-25°C to +50°C		-13°F to 122°F
Life Lumen Maintenance	50,000 hours		

Recommended Tracks

LP2410

REC2421

UCH2428

ANG2622

See track page for more compatible tracks. See individual track cutsheets for more details.

Part Number Configuration

FLEX	ULTRA_5.2W	24VDC	
-------------	-------------------	--------------	--

Category	Family (fam)	Operating Voltage	Finish (fin)	Light Colour (lc)
FLEX	ULTRA_5.2W	24VDC	WHT White BLK Black ¹	RGBW2700K RGBW3000K RGBW4000K RGBW5000K



¹ SPECIAL ORDER. Please confirm availability. Allow for 4 – 6 weeks lead time. ² See Connections page(s) for more details.



LED Flex Light • UltraBright 5.2 Watt RGBW • Track Options

Please visit our **products page** on our website to view all tracks, along with track specifications.

