


LED Flex Light • RegularBright 3W Bendable

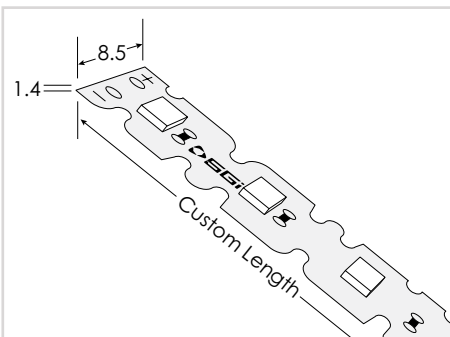

Dimensions in millimeters.

Length	Custom Length ² cuttable every 5.6" (142 mm)		
Operating Voltage	24V DC		
Finish (fin)	Bare board (no covering), available in: WHT White PCB		
Light Colour (lc) Correlated Colour Temperature (CCT)	2700K Incandescent White 3000K Warm White 3500K Sand White 4000K Neutral White 5000K Cool White CST R Red, G Green, B Blue, A Amber ³		
Beam Angle (ba) Degrees	120°		
Light Output Lumens (at 85 CRI)	2700K	247	per foot
	3000K	260	per foot
	3500K	267	per foot
	4000K	274	per foot
	5000K	287	per foot
CRI (cri) Colour Rendering Index	90		
IP Rating	IP20		
Dimension Width, Height, Length	W	0.335"	8.5 mm
	H	0.055"	1.4 mm
	L	Specify maximum length in inches	
Watts	3 Watts per foot		
Input Voltage	AC 100V – 240V, 277V external transformer		
Dimmable	Yes With dimmable transformer MLV, ELV, Phase or 0-10V. Please specify at time of order. Sold separately.		
Operating Temperature	-25°C to +50°C		-13°F to 122°F
Life Lumen Maintenance	50,000 hours		
Warranty	5 Years		

Part Number Configuration

FLEX	REGBEND_3W	24VDC	WHT	90
-------------	-------------------	--------------	------------	-----------

Category	Family	Operating Voltage	Finish (fin)	Light Colour (lc)	CRI (cri)
FLEX	REGBEND_3W	24VDC	WHT White	2700K 3000K 3500K 4000K 5000K CST ³	90



¹ SPECIAL ORDER. Please confirm availability. Allow for 4 – 6 weeks lead time. ² See Connections page(s) for more details.

³ SPECIAL ORDER: Available in single colour R Red, G Green, B Blue, A Amber.