


LED Flex Light • UltraBright 4.4 Watt Bendable RGB

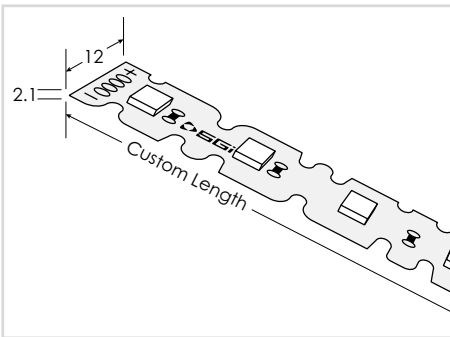

Dimensions in millimeters.

Length	Custom Length ² cuttable every 4.0"(101.6 mm)
Operating Voltage	24V DC
Finish (fin)	Bare board (no covering), available in: WHT White PCB
Light Colour (lc) Correlated Colour Temperature (CCT)	RGB Colour Changing Also available in Whites and Single Colours Please see individual product spec sheets
Beam Angle (ba) Degrees	120°
Light Output Lumens (at 90 CRI)	RGB White 336.6 per foot
IP Rating	IP20
Dimension Width, Height, Length	W 0.472" 12 mm H 0.11" 3 mm L Specify maximum length in inches
Watts	4.4 Watts per foot
Input Voltage	AC 100V – 240V, 277V external transformer
Dimmable	Yes With dimmable transformer MLV, ELV, Phase or 0-10V. Please specify at time of order. Sold separately.
Operating Temperature	-25°C to +50°C -13°F to 122°F
Life Lumen Maintenance	50,000 hours
Warranty	5 Years

Part Number Configuration

FLEX	REGBEND_4.4W	24VDC	WHT	RGB
-------------	---------------------	--------------	------------	------------

Category	Family	Operating Voltage	Finish (fin)	Light Colour (lc)
FLEX	ULTRABEND_4.4W	24VDC	WHT White	RGB



¹ SPECIAL ORDER. Please confirm availability. Allow for 4 – 6 weeks lead time. ² See Connections page(s) for more details.