


# LED Flex Light • UltraBright 4.4 Watt IP68

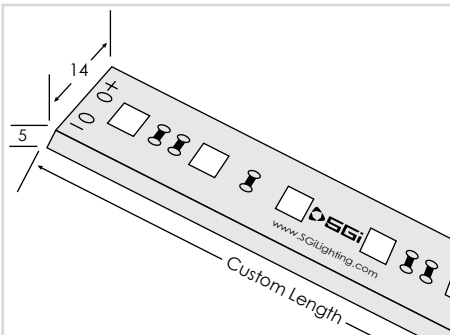

Dimensions in millimeters

<b>Length</b>	Custom Length <sup>2</sup> cuttable every 4.0" (101.6 mm)		
<b>Operating Voltage</b>	24V DC		
<b>Finish (fin)</b>	WHTC	Clear White	
	WHTF	Frosted White <sup>1</sup>	
	BLKC	Clear Black <sup>1</sup>	
<b>Light Colour (lc)</b> Correlated Colour Temperature (CCT)	2700K	Incandescent White	
	3000K	Warm White	
	3500K	Sand White	
	4000K	Neutral White	
	5000K	Cool White	
	CST	R Red, G Green, B Blue, A Amber <sup>3</sup>	
	See RGB spec sheets for Colour Changing options		
<b>Beam Angle (ba)</b> Degrees	120°		
<b>Light Output</b> Lumens (at 90 CRI)	2700K	310.6	per foot
	3000K	338.2	per foot
	3500K	365.8	per foot
	4000K	393.2	per foot
	5000K	420.7	per foot
<b>CRI (cri)</b> Colour Rendering Index	90		
<b>IP Rating</b>	IP68 <sup>1</sup>		
<b>Dimension</b> Width, Height, Length	W	0.551"	14 mm
	H	0.196"	5 mm
	L	Specify maximum length in inches	
<b>Watts</b>	4.4 Watts per foot		
<b>Input Voltage</b>	AC 100V – 240V, 277V external transformer		
<b>Dimmable</b>	Yes With dimmable transformer MLV, ELV, Phase or 0-10V. Please specify at time of order.		
<b>Operating Temperature</b>	-25°C to +50°C		-13°F to 122°F
<b>Life</b> Lumen Maintenance	50,000 hours		
<b>Warranty</b>	5 Years		

## Recommended Tracks

LP2410

REC2421

UCH2428

GENIE\_PROFILE-DOME

See track page for more compatible tracks. See individual track cutsheets for more details.

## Part Number Configuration

**FLEX**      **ULTRA\_4.4W-IP68**      **24VDC**      **90**

Category	Family (fam)	Operating Voltage (ov)	Finish (fin)	Light Colour (lc)	CRI (cri)
FLEX	ULTRA_4.4W-IP68 <sup>1</sup>	24VDC	<b>WHTC</b> Clear White <b>WHTF</b> Frosted White <sup>1</sup> <b>BLKC</b> Clear Black <sup>1</sup>	<b>2700K</b> <b>3000K</b> <b>3500K</b> <b>4000K</b> <b>5000K</b> <b>CST<sup>3</sup></b>	90



<sup>1</sup> SPECIAL ORDER. Please confirm availability. Allow for 4 – 6 weeks lead time. <sup>2</sup> See Connections page(s) for more details.

<sup>3</sup> SPECIAL ORDER: Available in single colour R Red, G Green, B Blue, A Amber.